

SW8611




SW8611-0
with butterfly panel

- SMALL IN SIZE, ELEGANT LOOK, TAKE NO SPACE.
- LOUD, WIDE FREQUENCY RANGE, BEST SOUND QUALITY
- BLUETOOTH EQUIPPED
- BUILD-IN AMPLIFIER AND POWER PCB
- EASY INSTALLATION, JUST PLUG AND PLAY. SUITABLE EITHER AC:110 OR AC:220(V)
- WIDE APPLICATIONS FROM WALL, CABINET AND....
- CUSTOMIZATION IS WELCOME.

SOCKET SPEAKER (without butterfly panel)

CATEGORY	Full Range
IMPEDANCE	4 Ω
SPL MAX (6W)	89dB
CROSSOVER POINT	N/A
INPUT VOLTAGE	AC:100~230V
FREQUENCY	100Hz ~ 20KHz (-6dB)
AMPLIFIER POWER	6 W
RESONANCE FREQUENCY(Fs)	100Hz
MODULE MODEL	T1-2025SH
AMPLIFIER MODEL	AMH183-8A
BLUETOOTH PAIRING ID	TB-Switch
DIMENSION(EXTERNAL)	83.5x83.5x44(mm)

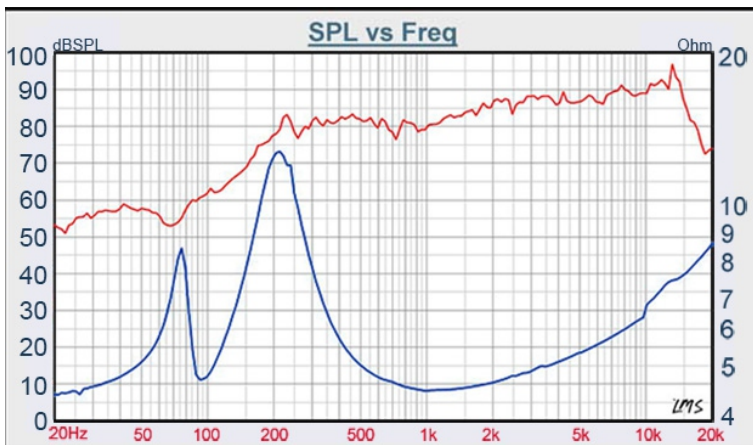

※ This Socket Speaker SPEC matches with China's standard 86*86mm junction box size