


# MODULE


# T1-2121SD

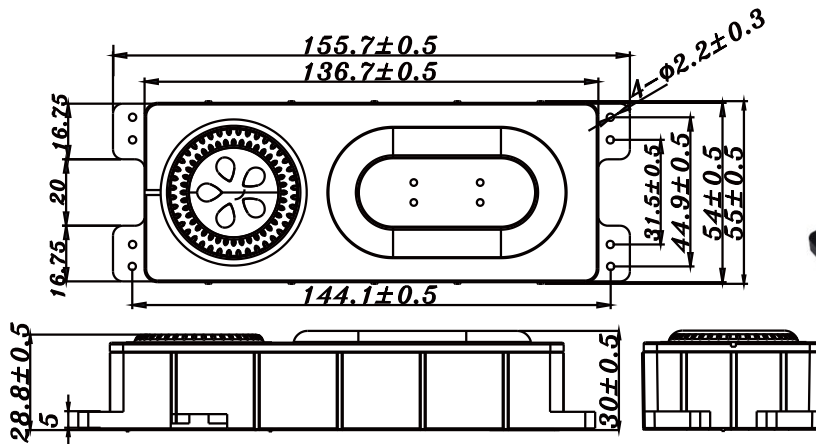

- COMPREHENSIVE SOLUTION FOR AUDIO DESIGN.
- COMBINE DRIVER, PASSIVE RADIATOR AND BOX AS ONE UNIT, PATENTED.
- SLIM AND TINY, LOW BASS FO = 78 Hz.
- MODULE COULD BE RESHAPED TO FIT CUSTOMER'S APPLICATION.
- GOOD FOR PORTABLE, SOUNDBAR, MULTIMEDIA... APPLICATION.

## SYSTEM SPECIFICATION

SYSTEM	Passive radiator design
ACTIVE DRIVER	46mm inverted shape driver
DIAPHRAGM	Alum. composite with elastomer
HOUSING	PP composite material
FINISH	Black
DIMENSIONS	157 x 54 x 29.5mm
VOICE COIL DIAMETER	28 mm
IMPEDANCE	4 ohm
POWER LOADING	6 W (RMS)
MUSIC POWER	12 W
RESPONSE RANGE	78Hz - 20KHz
SENSITIVITY 1W / 1m	79 dB
FO	78Hz
POWER RECOMMENDED	6 W (RMS)
DESIGN SUGGESTION	High pass filter with 87Hz, -12dB/oct

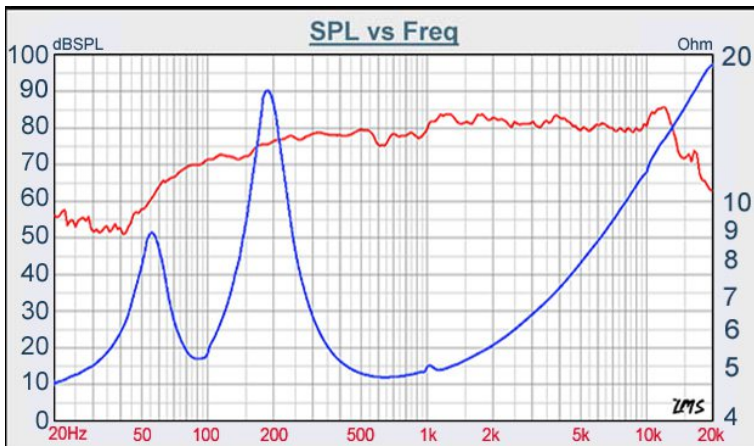

VOICE: 886.2.26570282 FAX: 886.2.26580166  
E-MAIL: info@tb-speaker.com