



F SERIES

W4-1757SB

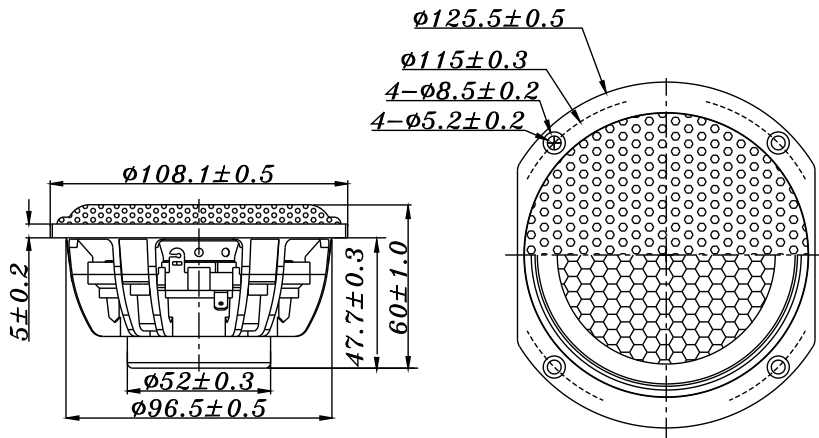

- FLAT ALUMINUM SANDWICH CONE DURABLE FOAM RUBBER SURROUND
- 38mm OF VC
- SHALLOW DESIGN
- NEODYMIUM MAGNET, SHIELDED
- THE WIDEST DISPERSION OF OFF-AXIS FREQUENCY RESPONSE
- LOW THD DESIGN

4" SANDWICH FULL RANGE

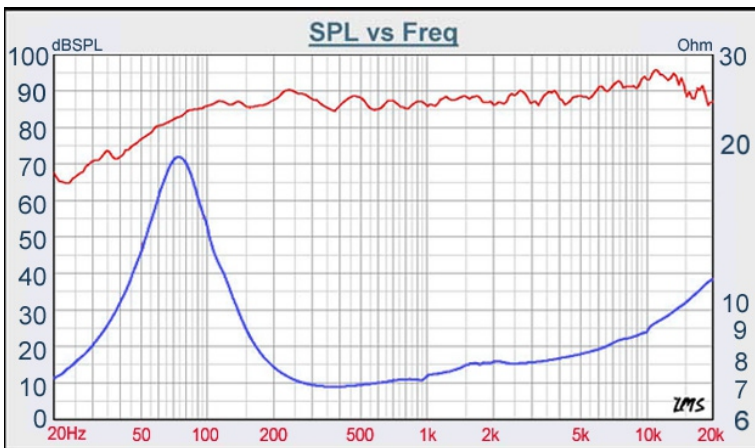

DIAPHRAGM MTL	Sandwich
SURROUND MTL	Foam Rubber
NOMINAL IMPEDANCE	6 Ω
DCR IMPEDANCE	5.6 Ω
SENSITIVITY 1W/1m	86 dB
FREQUENCY RESPONSE	75 - 20K Hz
FREE AIR RESONANCE	75 Hz
VOICE COIL DIAMETER	38.5 mm
AIR GAP HEIGHT	11 mm
RATED POWER INPUT	30 W
MAXIMUM POWER INPUT	60 W
FORCE FACTOR, BL	4.51 TM
TYPE OF MAGNET	Neodymium
MOVING MASS	4.99 g
FERROFLUID ENHANCED	No
SUSPENSION COMPLIANCE	907.479 μMN^{-1}
EFFECTIVE PISTON AREA	0.0057 M^2
Levc	0.019 mH
Zo	17 Ω
X-max	3 mm
Vas	4.19 Litr
Qts	0.46
Qms	1.55
Qes	0.65

TB SPEAKERS

VOICE: 886.2.26570282 FAX: 886.2.26580166
E-MAIL: info@tb-speaker.com