



F SERIES

W1-1925SB

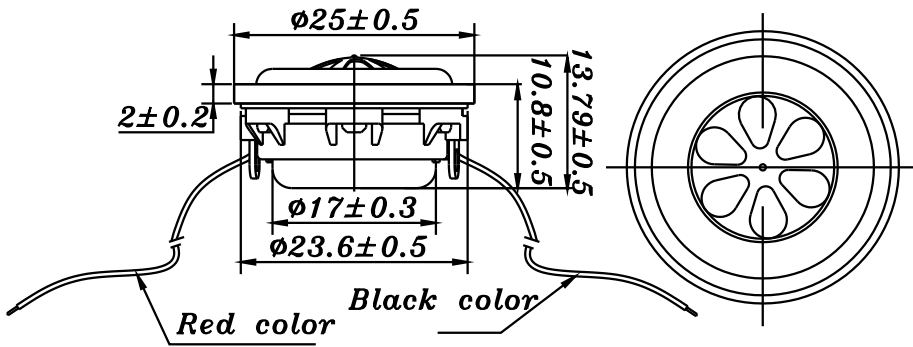

- THE HIGHEST PERFORMANCE OF INNOVATIVE, TINY FULL RANGE DRIVER DESIGN
- OUTSIDE DIAMETER OF 25mm, Fo:220Hz
- PP CONE WITH SANTOPRENE SURROUND
- NEODYMIUM MOTOR SYSTEM
- PATENTED PRODUCT WITH EXCELLENT CONSISTENCY
- IT'S GOOD FOR MULTIMEDIA APPLICATION

1" PP CONE, FULL RANGE

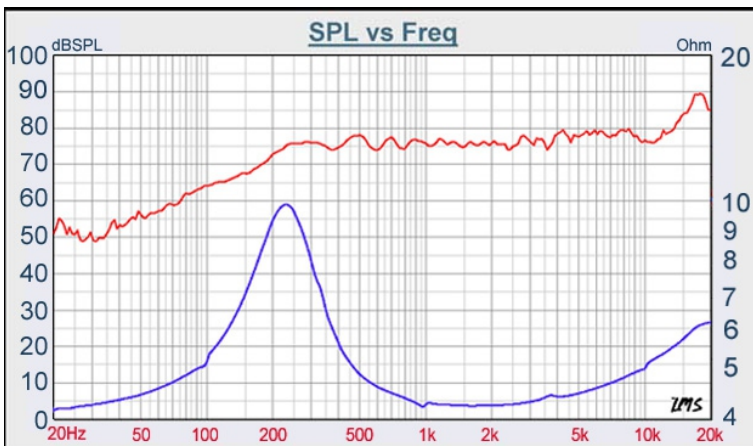

DIAPHRAGM MTL	Mineral filled pp
SURROUND MTL	Santoprene
NOMINAL IMPEDANCE	4 Ω
DCR IMPEDANCE	3.5 Ω
SENSITIVITY 1W/1m	75 dB
FREQUENCY RESPONSE	220 -20K Hz
FREE AIR RESONANCE	220 Hz
VOICE COIL DIAMETER	13.28 mm
AIR GAP HEIGHT	1.5 mm
RATED POWER INPUT	1 W
MAXIMUM POWER INPUT	2 W
FORCE FACTOR, BL	1.12 TM
TYPE OF MAGNET	Neodymium
MOVING MASS	0.20 g
FERROFLUID ENHANCED	YES
SUSPENSION COMPLIANCE	2399 μMN^{-1}
EFFECTIVE PISTON AREA	0.00023 M^2
Levc	0.008 mH
Zo	10 Ω
X-max	0.75 mm
Vas	0.018 Litr
Qts	0.54
Qms	0.61
Qes	0.82

TB SPEAKERS

VOICE:886.2.26570282 FAX:886.2.26580166
E-MAIL :info@tb-speaker.com