



# PM SERIES

# W6-1559S

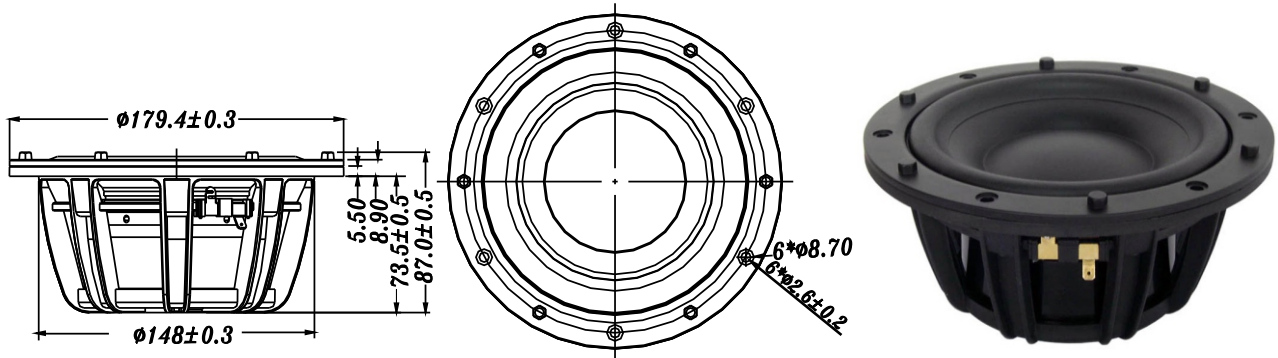

- INJECTION PPM CONE, WILD RANGE TEMPERATURE OF RUBBER SURROUND
- VENTED POLE PIECE, NEODYMIUM MOTOR STRUCTURE
- GF REINFORCED NYLON BASKET
- MAGNETICALLY SHIELDED
- SUITABLE FOR MIDBASS APPLICATION
- 75MM OF VOICE COIL

## 6.5" PPM WOOFER

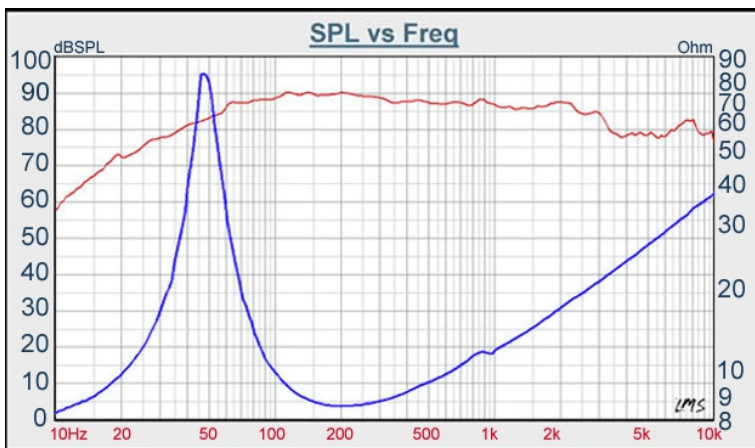

DIAPHRAGM MTL	Black color PPM
SURROUND MTL	RUBBER
NOMINAL IMPEDANCE	8 Ω
DCR IMPEDANCE	6.6 Ω
SENSITIVITY 1W/1m	89 dB
FREQUENCY RESPONSE	45 - 4 K Hz
FREE AIR RESONANCE	45 Hz
VOICE COIL DIAMETER	75.5 mm
AIR GAP HEIGHT	8 mm
RATED POWER INPUT	50 W
MAXIMUM POWER INPUT	100 W
FORCE FACTOR, BL	13.71 TM
TYPE OF MAGNET	Neodymium
MOVING MASS	24.95 g
FERROFLUID ENHANCED	No
SUSPENSION COMPLIANCE	479.71 μMN <sup>-1</sup>
EFFECTIVE PISTON AREA	0.0014 M <sup>2</sup>
Levc	0.32 mH
Zo	190 Ω
X-max	5.5 mm
Vas	13.35 Litr
Qts	0.24
Qms	7.12
Qes	0.25



VOICE: 886.2.26570282 FAX: 886.2.26580166  
E-MAIL: info@tb-speaker.com