



# F SERIES

# W5-1880

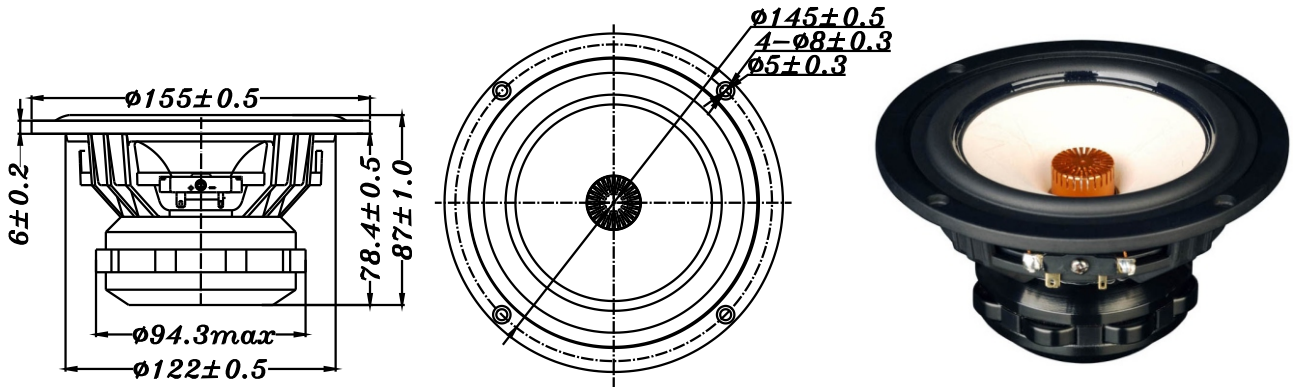

- FULL RANGE DESIGN
- UNDERHUNG MOTOR DESIGN WITH NEO MAGNET, Xmax = 5mm
- VERY LOW THD (2<sup>nd</sup> AND 3<sup>rd</sup> HARMONIC DISTORTION)
- UNIQUE PHASE PLUG FOR BETTER DISPERSION
- BAMBOO FIBER PAPER CONE WITH DURABLE FOAM RUBBER SURROUND

## 5" PAPER FULL RANGE

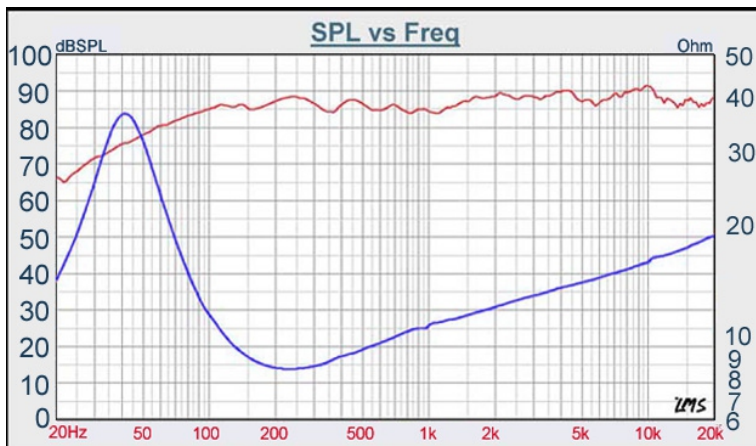

DIAPHRAGM MTL	Paper
SURROUND MTL	Foam Rubber
NOMINAL IMPEDANCE	8 Ω
DCR IMPEDANCE	6.3 Ω
SENSITIVITY 1W/1m	88 dB
FREQUENCY RESPONSE	48 - 20K Hz
FREE AIR RESONANCE	48 Hz
VOICE COIL DIAMETER	25.4 mm
AIR GAP HEIGHT	15 mm
RATED POWER INPUT	30 W
MAXIMUM POWER INPUT	60 W
FORCE FACTOR, BL	5.46 TM
TYPE OF MAGNET	Neodymium
MOVING MASS	7.0 g
FERROFLUID ENHANCED	No
SUSPENSION COMPLIANCE	2110 μMN <sup>-1</sup>
EFFECTIVE PISTON AREA	0.0094 M <sup>2</sup>
Levc	0.023 mH
Zo	35 Ω
X-max	5.0 mm
Vas	26.47 Litr
Qts	0.32
Qms	1.78
Qes	0.38

**TB SPEAKERS**

VOICE:886.2.26570282 FAX:886.2.26580166  
E-MAIL :info@tb-speaker.com