


# MODULE


# T1-1815SA

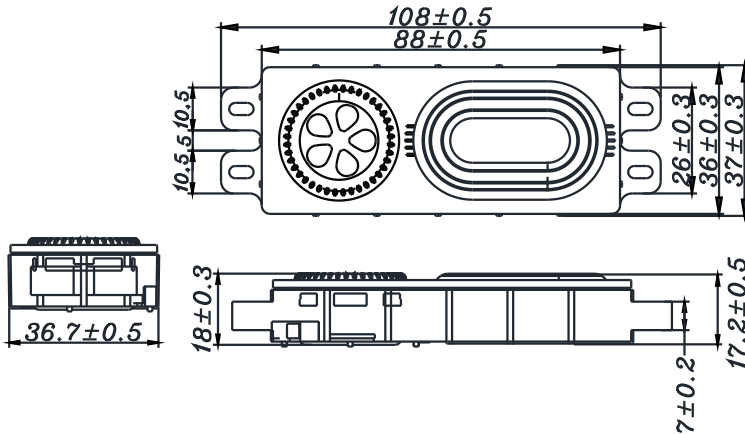

- COMPREHENSIVE SOLUTION FOR AUDIO DESIGN.
- COMBINE DRIVER, PASSIVE RADIATOR AND BOX AS ONE UNIT, PATENTED.
- SLIM AND TINY, LOW BASS FO = 100 Hz.
- MODULE COULD BE RESHAPED TO FIT CUSTOMER'S APPLICATION.
- GOOD FOR PORTABLE, SOUNDBAR, MULTIMEDIA... APPLICATION.
- MOUNTING KIT WITH AMPLIFIER IS AVAILABLE.

## SYSTEM SPECIFICATION

SYSTEM	Passive radiator design
ACTIVE DRIVER	31mm inverted shape driver
DIAPHRAGM	Alum. composite with elastomer
HOUSING	PP composite material
FINISH	Black
DIMENSIONS	108 x 37 x 17.2mm
VOICE COIL DIAMETER	19.4 mm
IMPEDANCE	4 ohm
POWER LOADING	2 W (RMS)
MUSIC POWER	4 W
RESPONSE RANGE	100Hz - 20KHz
SENSITIVITY	78 dB (M / W)
FO	100 Hz
POWER RECOMMENDED	3W (RMS)
DESIGN SUGGESTION	High pass filter with 100Hz, -12dB/oct

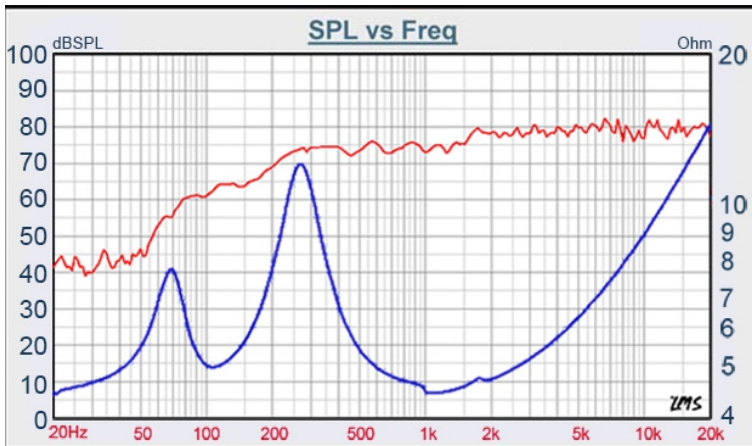

**TB** SPEAKERS

VOICE:886.2.26570282 FAX:886.2.26580166  
E-MAIL :info@tb-speaker.com