

MODULE

T3-2190S



- NEODYMIUM MAGNET, LONG STROKE SUBWOOFER DRIVER.
- PATENTED PASSIVE RADIATOR BOX DESIGN TO MAKE LOW BASS Fs= 50 HZ.
- THIN AND FLAT DESIGN, EASY FOR EXTERIOR DESIGN.
- GOOD FOR PORTABLE, SMART HOME AND VARIETY OF CROSS-INDUSTRY APPLICATIONS THAT NEED LOW-BASS SOLUTIONS.

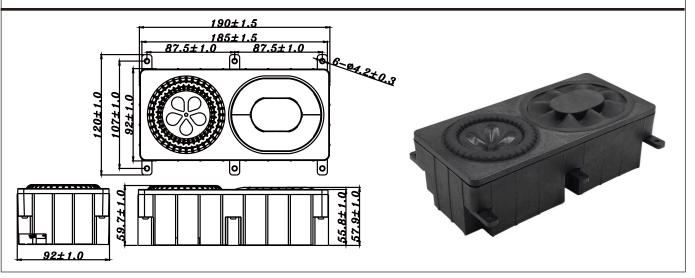

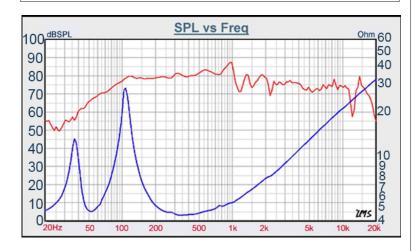

VOICE:886.2.26570282 FAX:886.2.26580166 E-MAIL:info@tb-speaker.com

SYSTEM SPECIFICATION

SYSTEM Passive radiator design ACTIVE DRIVER 3" inverted shape driver DIAPHRAGM PP composite with elastomer HOUSING PP composite material **FINISH** Black **DIMENSIONS** 190 x 120 x 59.7mm VOICE COIL DIAMETER 25.4 mm **IMPEDANCE** 4 ohm POWER LOADING 15 W (RMS) MUSIC POWER 30 W RESPONSE RANGE 50Hz - 2KHz SENSITIVITY 1W / 1m 80 dB Fs 50Hz POWER RECOMMENDED 30 W (RMS) **DESIGN SUGGESTION** High pass filter with 45Hz.

-12dB/oct