

MODULE

T1-1815SA



- COMPRERHNSIVE SOLUTION FOR AUDIO DESIGN.
- COMBINE DRIVER, PASSIVE RADIATOR AND BOX AS ONE UNIT, PATENTED.
- SLIM AND TINY, LOW BASS Fs = 105 Hz.
- MODULE COULD BE RESHAPED TO FIT CUSTOMER'S APPLICATION.
- GOOD FOR PORTABLE, SOUNDBAR, MULTIMEDIA... APPLICATION.
- MOUNTING KIT WITH AMPLIFIER IS AVAILABLE.

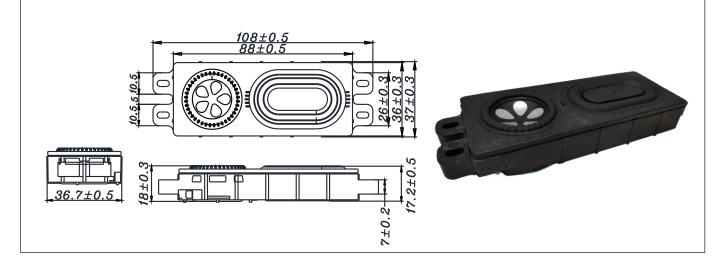

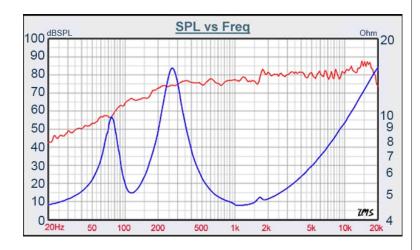

VOICE:886.2.26570282 FAX:886.2.26580166 E-MAIL:info@tb-speaker.com

SYSTEM SPECIFICATION

SYSTEM Passive radiator design ACTIVE DRIVER 31mm inverted shape driver DIAPHRAGM Alum. composite with elastomer HOUSING PP composite material **FINISH** Black **DIMENSIONS** 108 x 37 x 18 mm VOICE COIL DIAMETER 19.4 mm **IMPEDANCE** 4 ohm POWER LOADING 2 W (RMS) MUSIC POWER 4 W RESPONSE RANGE 105Hz - 20KHz 77 dB (M/W) **SENSITIVITY** FS 105 Hz POWER RECOMMENDED 3W (RMS) DESIGN SUGGESTION High pass filter with 100Hz,

-12dB/oct