



F SERIES

W1-2124S

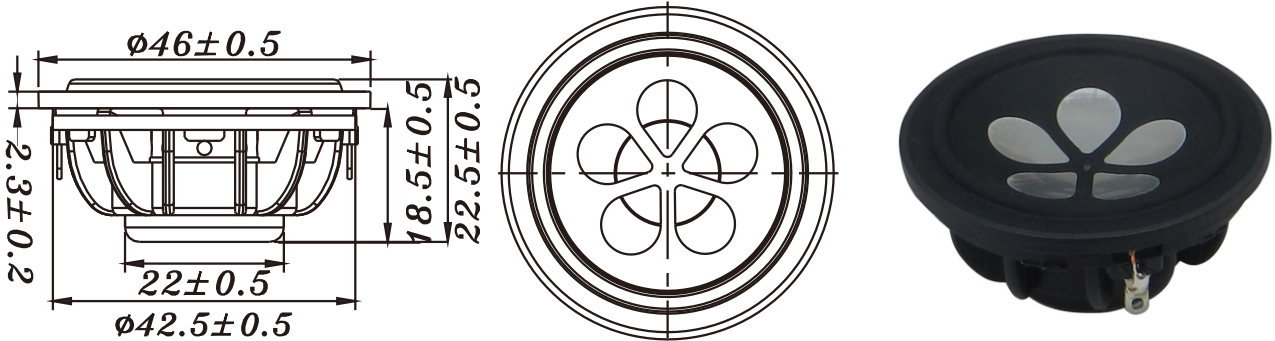

- THE BEST PERFORMANCE OF INNOVATIVE, TINY FULL RANGE DRIVER DESIGN
- SURROUND OUTSIDE DIAMETER IS 46mm, Fo:190Hz
- ALUM. CONE WITH SANTOPRENE SURROUND
- NEODYMIUM MOTOR SYSTEM
- PATENTED PRODUCT WITH EXCELLENT CONSISTENCY
- PERFECTLY MATCH WITH MULTIMEDIA APPLICATION

1" ALUM CONE, FULL RANGE

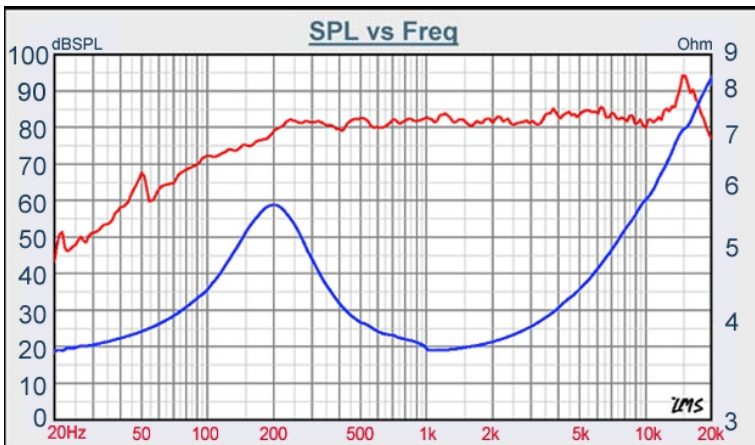

DIAPHRAGM MTL	Aluminium
SURROUND MTL	Santoprene
NOMINAL IMPEDANCE	4 Ω
DCR IMPEDANCE	3.2 Ω
SENSITIVITY 1W/1m	81 dB
FREQUENCY RESPONSE	190 -20 K Hz
FREE AIR RESONANCE	190 Hz
VOICE COIL DIAMETER	14.28 mm
AIR GAP HEIGHT	2 mm
RATED POWER INPUT	2 W
MAXIMUM POWER INPUT	4 W
FORCE FACTOR, BL	1.71 TM
TYPE OF MAGNET	Neodymium
MOVING MASS	0.798 g
FERROFLUID ENHANCED	YES
SUSPENSION COMPLIANCE	811.89 μMN^{-1}
EFFECTIVE PISTON AREA	0.00010 M^2
Levc	0.025 mH
Zo	6 Ω
X-max	0.7 mm
Vas	0.12 Litr
Qts	0.48
Qms	0.85
Qes	1.08

TB SPEAKERS

VOICE:886.2.26570282 FAX:886.2.26580166
E-MAIL :info@tb-speaker.com