




W23-1287SI

2x3" PPM盆 全音域

Datasheet

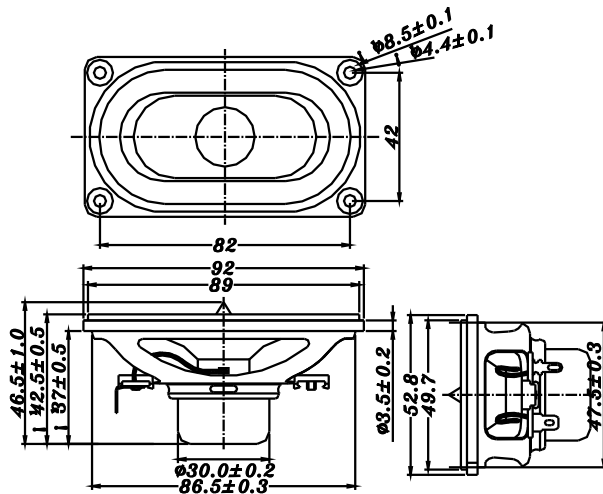

DIAPHRAGM MTL	Natural color PPM
SURROUND MTL	Santoprene
NOMINAL IMPEDANCE	4 Ω
SENSITIVITY 1W/1m	88 dB
FREQUENCY RESPONSE	150 - 20 K Hz
FREE AIR RESONANCE	150 Hz
VOICE COIL DIAMETER	18.4 mm
AIR GAP HEIGHT	3 mm
RATED POWER INPUT	12 W
MAXIMUM POWER INPUT	24 W
X-max	0.9 mm

TB speaker