



F SERIES

W1-2361S




black and red wire : 100±5mm

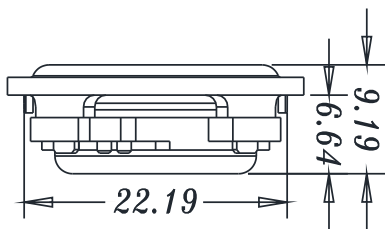

- EXTREMELY SLIM 1" FULL RANGE DRIVER, BUILT WITH MOST INNOVATIVE AND HIGHEST PERFORMANCE DESIGN
- 25mm OUTSIDE DIAMETER, $F_0:220\text{Hz}$
- ALUMINUM DIAPHRAGM, TPV SURROUND AND NEODYMIUM MAGNET SYSTEM
- BEST FOR LIMITED SPACE AND NEED GOOD SOUND APPLICATION

1" ALUM, FULL RANGE

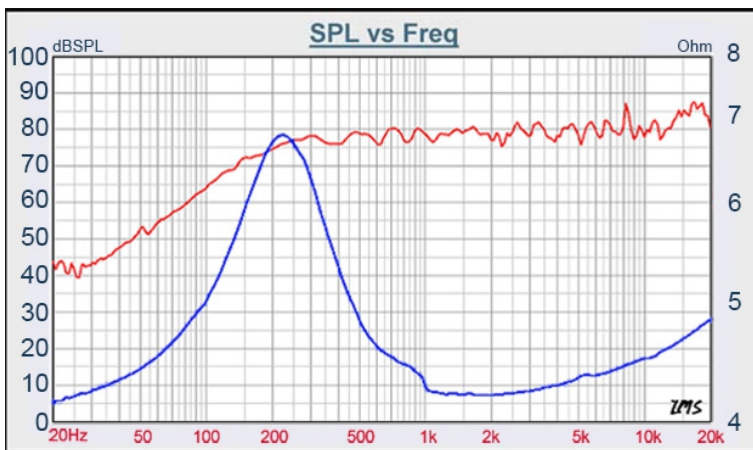

DIAPHRAGM MTL	Aluminium
SURROUND MTL	Santoprene
NOMINAL IMPEDANCE	4 Ω
DCR IMPEDANCE	3.6 Ω
SENSITIVITY 1W/1m	78 dB
FREQUENCY RESPONSE	220-20K Hz
FREE AIR RESONANCE	220 Hz
VOICE COIL DIAMETER	13.28 mm
AIR GAP HEIGHT	1.5 mm
RATED POWER INPUT	1 W
MAXIMUM POWER INPUT	2 W
FORCE FACTOR, BL	1.03 TM
TYPE OF MAGNET	Neodymium
MOVING MASS	0.15 g
FERROFLUID ENHANCED	Yes
SUSPENSION COMPLIANCE	3516 μMN^{-1}
EFFECTIVE PISTON AREA	0.00025 M^2
Levc	0.0031 mH
Zo	7 Ω
X-max	0.25 mm
Vas	0.031 Litr
Qts	0.42
Qms	0.81
Qes	0.88



VOICE:886.2.26570282 FAX:886.2.26580166
E-MAIL :info@tb-speaker.com